REVISIONS					
ECR	REVISION	DESCRIPTION	CHANGED BY	DATE	APPROVED BY
3549	B	UPDATED ITEM 1	CB	12/14/2017	FH

SPECIFICATIONS:

VALVE TYPE	PULL/ SPRING RETURN, 3 WAY 2 POSITION
NUMBER OF PORTS	3
VALVE OPERATOR	PULL/ SPRING RETURN
OPERATING RANGE	0-150 PSI
VALVE PRE LOAD	20.5 LBS
VALVE WORKING LOAD	29.5 LBS
STROKE	0.36 IN

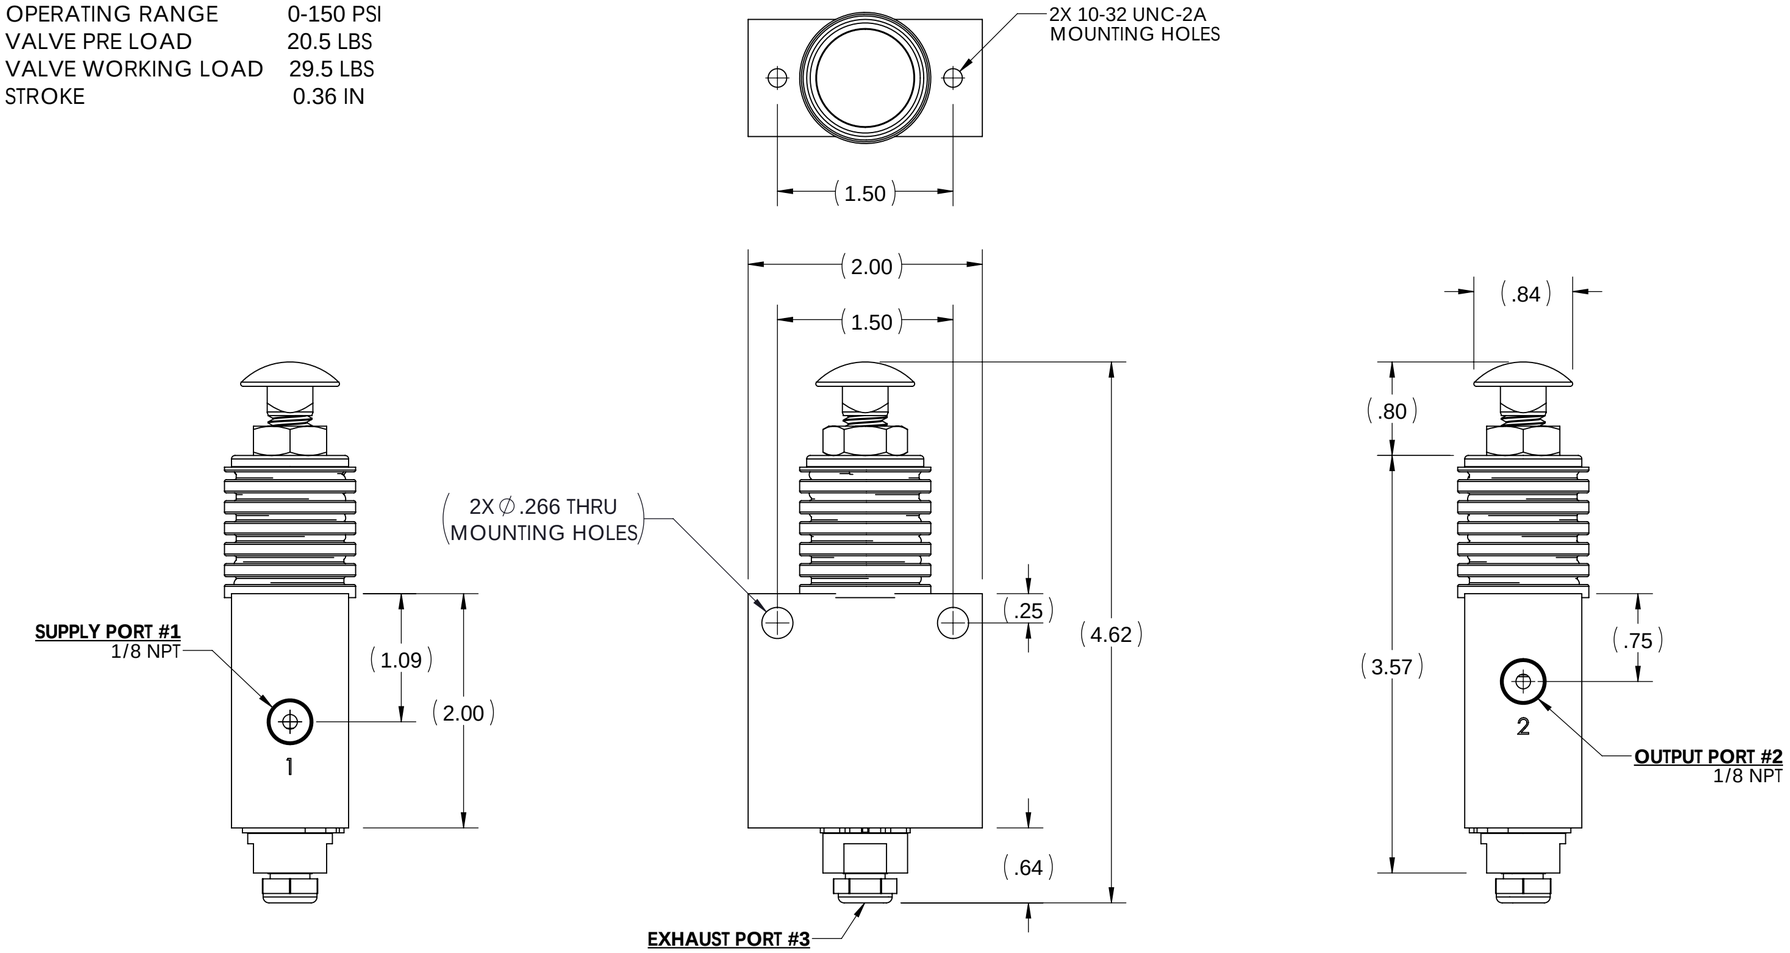



VALVE SCHEMATIC
NORMALY OPEN TO PORT #2

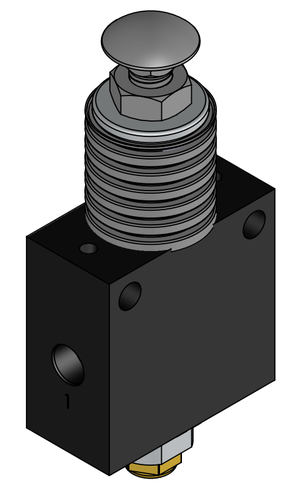

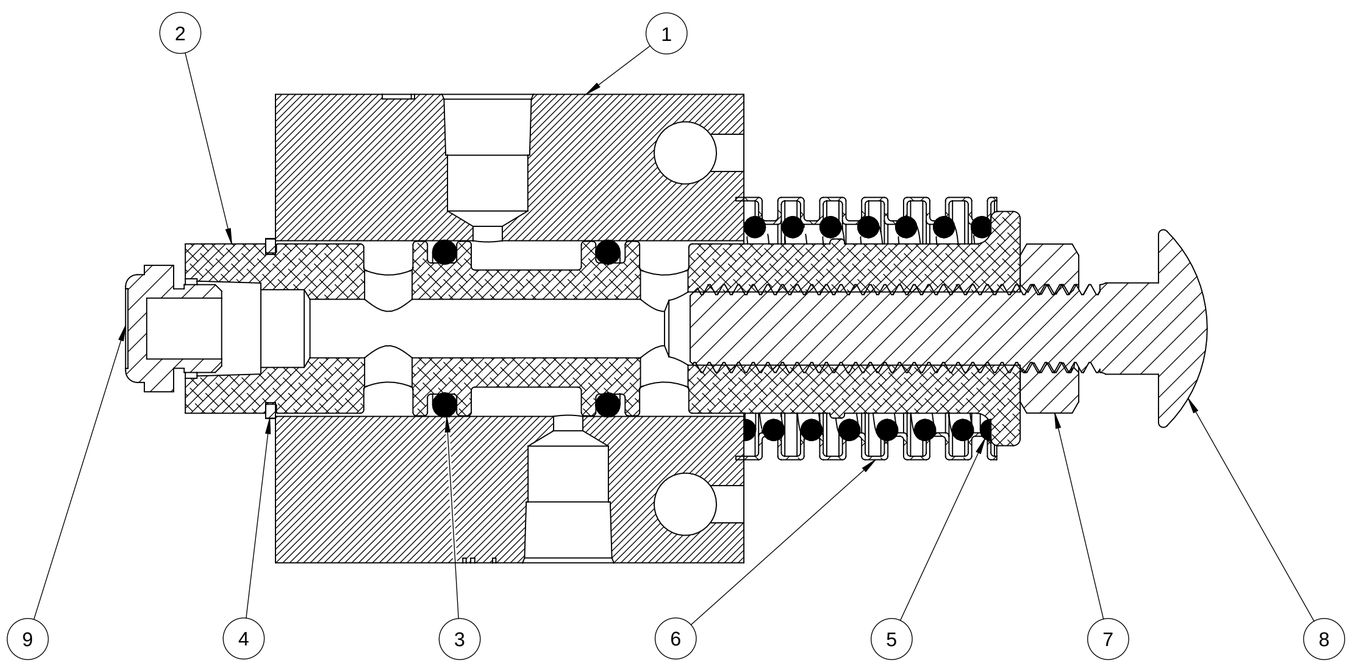

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	3274	VALVE BODY V-5 W/ MOUNT HOLES	1
2	7523	SPOOL V-5-LV	1
3	1205	O-RING 2-113 3/4 OD 9/16 ID	2
4	1206	SNAP RING, EXT .688 D	1
5	3342	SPRING, .78 ID x .96 OD x 1.97	1
6	3341	BOOT FOR V-5-B AND V-8-B	1
7	1166	NUT 3/8-16 NC HEX JAM	1
8	7524	3/8-16 X 2" CARRIAGE BOLT	1
9	6121	BREATHER 1/8 NPT	1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF **APSCO Inc.**. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION OF **APSCO Inc.** IS PROHIBITED.

TYPE OF PROJECTION: THIRD ANGLE PROJECTION

MATERIAL: N/A

FINISH: N/A

DRAWN	AW	DATE 8/25/2017
CHECKED	JC	DATE 8/25/2017
APPROVED	FH	DATE 8/25/2017
FINAL	FH	DATE 8/25/2017

APSCO
8178 EAST 44TH STREET
TULSA, OK 74145
(918) 622-5600

TITLE: VALVE, PULL/ SR, 3-WAY, 2 POS, LV

DWG. NO. V-5-LV

ASSEMBLY TOLERANCE
DO NOT SCALE DRAWING
APEN001

SHEET SIZE	SCALE	REVISION
C	2:1	B

F/N: V-5-LV

SHT. 1 OF 1