

HYDRAULIC RESERVOIR, FILTER, & COOLING SYSTEM


ARC-60

HYDRAULIC RESERVOIR, FILTER,
AND COOLING SYSTEM



BETTER PERFORMANCE	COMPACT DESIGN	INCREASED DURABILITY	EASY INSTALLATION
<ul style="list-style-type: none">• Greater heat rejection• Revolutionary fan design• Automatic cold-weather bypass	<ul style="list-style-type: none">• Narrow width, less than 13"• Minimal fan clearance needed - 2"• Compact design so you can install in a space of less than 15"	<ul style="list-style-type: none">• Low maintenance internal plumbing• Manifold design for fewer parts to fail• Only 1 low pressure hydraulic hose• Corrosion resistant design-stainless steel/ aluminum construction	<ul style="list-style-type: none">• Rear studs for side rail mounting• Bracket assembly available for behind the cab mounting• All S.A.E. ports to help reduce leaks• S.A.E fitting available for your convenience

ARC-60 APSCO RESERVOIR COOLER SPECIFICATIONS

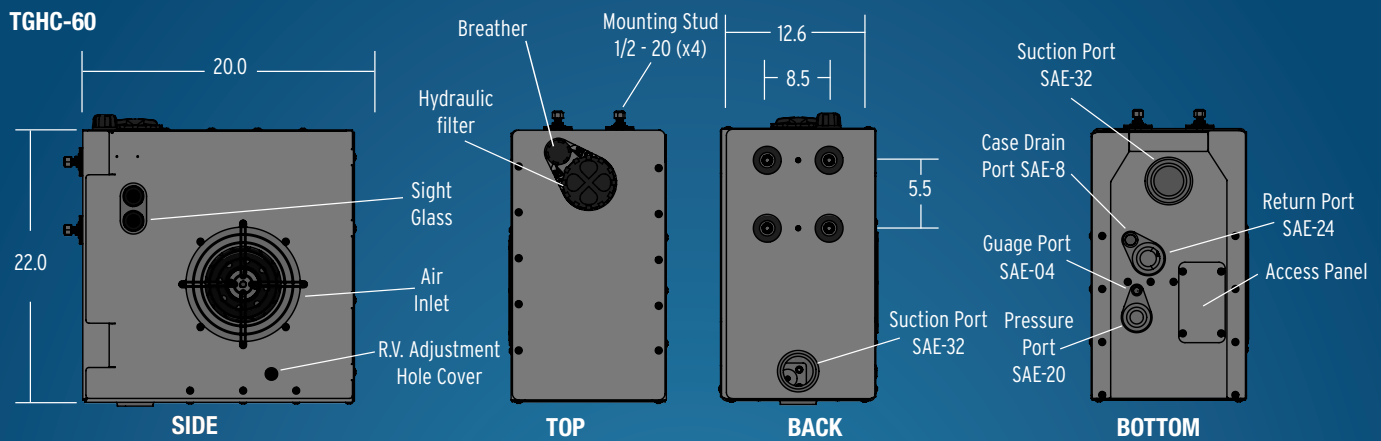

* FITTINGS NOT INCLUDED. SEE ACCESSORIES LIST FOR AVAILABLE FITTINGS

Model	Flow Rate (GPM)	Reservoir Size (Gallons)	Pressure (PSI)	HP Cooled
ARC-60	60	6.0	Up to 4,000	28

- Capacity60 gpm
- Slim Line or BoxSlim
- Tank Size6 gallon
- Back SuctionSAE-32 ORB Female
- Bottom Suction.....SAE-32 ORB Female
- High PressureSAE-20 ORB Female
- Low Pressure ReturnSAE 24 ORB Female
- Relief ValveAdjustable - Standard Range 500-3000 psi
(Higher range upon request)
- FanHydraulic Drive
- FilterTank top design w/integral breather, 25psi bypass
- Filter Element10 Micron, element easily serviceable from top
- Sight Glass.....Duel Bulls Eye
- Basic Dimensions (L X W X H)22 X 12.6 X 22 in.
- Cooler BypassCold Start Up - 60 psi high flow
- Case DrainSAE-8 ORB Female
- FinishStainless exterior brushed finish
- Gauge Port.....SAE-4 ORB Female
- Weight140lbs
- Heat Rejection28 HP at 60GPM and 80° ETD

SEE OUR COMPLETE LINE AT APSCOPOWER.COM

