

ADVANCED DESIGN & PERFORMANCE FROM APSCO



SS934

HYDRAULIC RESERVOIR, FILTER, AND COOLING SYSTEM

The THERMAFLOW SS934 is designed to supply top performance without using up valuable frame rail space. At only 9.25" wide, it will fit all low horsepower applications with a mounting bracket kit that will simplify your installation. The SS934 will drive most 3" and 4" product pumps and compressors, with options for multiple pump applications.



FOOD GRADE - CHEMICAL - COMPRESSED GAS - COMBO DRIVES

BETTER PERFORMANCE	COMPACT DESIGN	INCREASED DURABILITY	EASY INSTALLATION
<ul style="list-style-type: none"> • Cooling capacity up to 30 GPM • Optimized heat rejection • Available with electric or hydraulic fan • Air flow path from side to side 	<ul style="list-style-type: none"> • Narrow width, only 9.25" wide • Minimal fan clearance (2" per side) • 10 micron filter element • Integral directional control valve (optional) 	<ul style="list-style-type: none"> • Low maintenance, proven performance • Corrosion resistant design • Stainless steel construction • Easy access to filter element for maintenance • Modular construction for easy service 	<ul style="list-style-type: none"> • Standard rear studs - side frame rail mounting • SAE suction and JIC pressure/return ports for easy piping alignment • Port adapters available upon request • Optional behind-the-cab or no-drill mounts

SEE OUR COMPLETE LINE AT APSCOPOWER.COM


Sales (918) 622-5600 • Fax (918) 622-5469

Email: sales@apscopower.com



SS934 APSCO RESERVOIR COOLER SPECIFICATIONS

SS934HR MODEL DIMENSIONS SHOWN

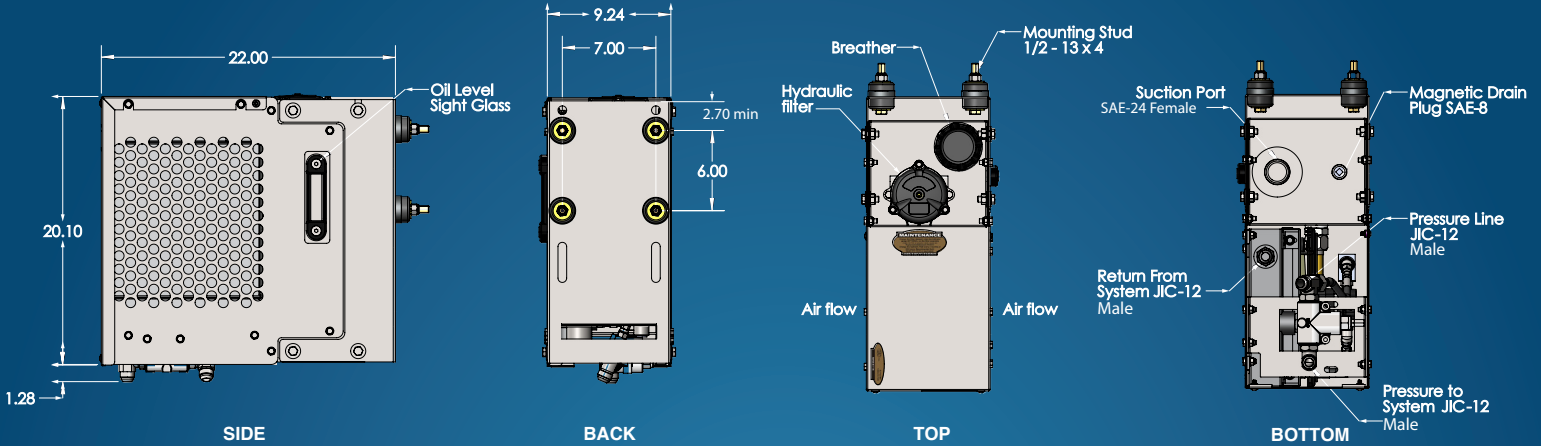

Model	Flow Rate (GPM)	Reservoir Size (Gallons)	Pressure (PSI)	Heat Rejection (HP)
SS934	30 Max	4	5,000 Max	10

* FITTINGS NOT INCLUDED. SEE ACCESSORIES LIST FOR AVAILABLE FITTINGS

Flow Rate (Capacity)	Up to 30 GPM
Slimline or Box	Slimline
Reservoir Tank Size	4 Gallon
Suction Port	SAE-24 Female
Pressure Port	JIC-12 Male
Return Port	JIC-12 Male
Relief Valve	Adjustable 500-3000 PSI (standard)
Fan	Hydraulic drive (2 GPM) or electric (12V / 25 AMP)
Case Drain	SAE-8 (magnetic plug)
Filter	Tank top design, 25 PSI bypass
Filter Element	10 Micron
Oil Level Sight Glass	5" Liquid level gauge with thermometer
Basic Dimensions (L x W x H)	.22 x 9.25 x 20"
Finish	304 Stainless steel exterior brushed finish
Heat Rejection	10 HP @ 30 GPM with 50°F exiting temp. differential

Multiple models available

SS934ER	SS934EV	SS934HR	SS934HV
ELECTRIC FAN, RELIEF VALVE	ELECTRIC FAN, DIRECTIONAL CONTROL VALVE	HYDRAULIC FAN, RELIEF VALVE	HYDRAULIC FAN, DIRECTIONAL CONTROL VALVE

The Thermaflow® hydraulic systems have been a market leader since 1989. APSCO offers a number of other models that can fit higher horsepower applications or custom design a hydraulic drive to fit the required application.

SEE OUR COMPLETE LINE AT APSCOPOWER.COM

Sales (918) 622-5600 • Fax (918) 622-5469

Email: sales@apscopower.com

